





Küresel Kosva Vana (TSE K 242)

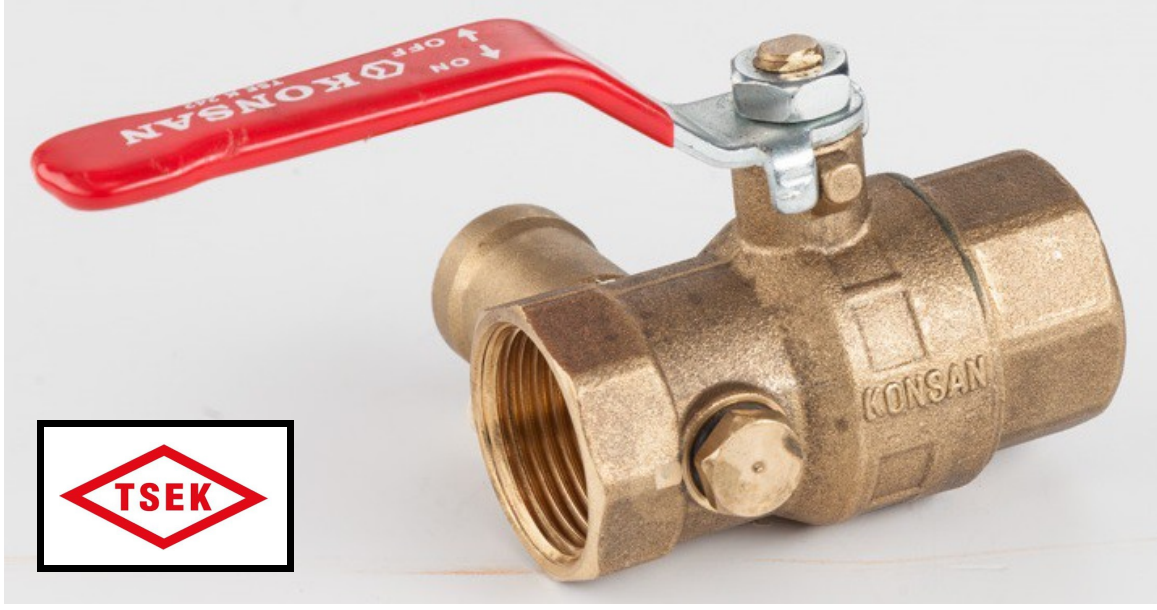


Ölçüler:

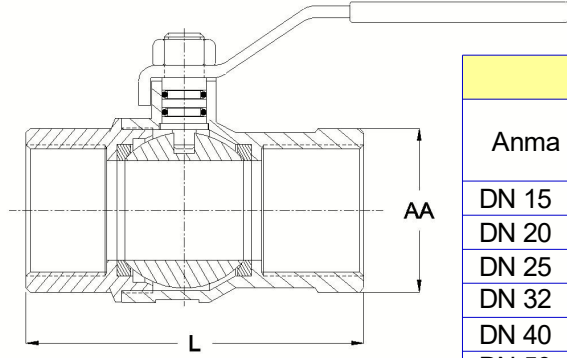

Küresel Kosva Vana Ölçü Tablosu

Anma Boyutu	L (mm)	AA (mm)	Çalışma Basıncı	Ağırlık
DN 15 - 1/2"	60,5	25,0	16 bar	175 gr
DN 20 - 3/4"	70,0	30,5	16 bar	300 gr
DN 25 - 1"	84,0	38,0	16 bar	475 gr
DN 32 - 1 1/4"	99,0	47,0	16 bar	750 gr
DN 40 - 1 1/2"	109,0	54,0	16 bar	1175 gr
DN 50 - 2"	129,0	67,0	16 bar	1600 gr

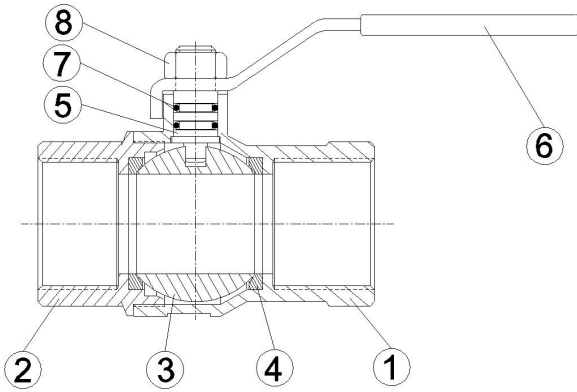

Malzeme Listesi

1	Gövde	CuZn40Pb2 (CW617N)
2	Kapak	CuZn40Pb2 (CW617N)
3	Küre	CuZn40Pb2 (CW617N)
4	Sızdırmazlık Ringi	PTFE (Teflon)
5	Mil	CuZn39Pb3 (CW614N)
6	Kol	Çelik (PVC kaplı)
7	Salmastra (O-ring)	NBR
8	Somun	Çelik (Galvaniz kaplı)

Kullanım Sıcaklıkları:

En az: Akışkan sıvı halde olmalıdır, küresel vana içinde donan akışkan küresel vanaya hasar verir.
En çok: 85°C

Kontrol Cihazları Sanayi ve Ticaret Ltd. Şti.

Marmara Sanayi Sitesi G 10 İkitelli Küçükçekmece / İstanbul

www.kontrolcihazlari.com.tr

2024-05-07