





Yeni Seri PN25 (TS EN 13547)

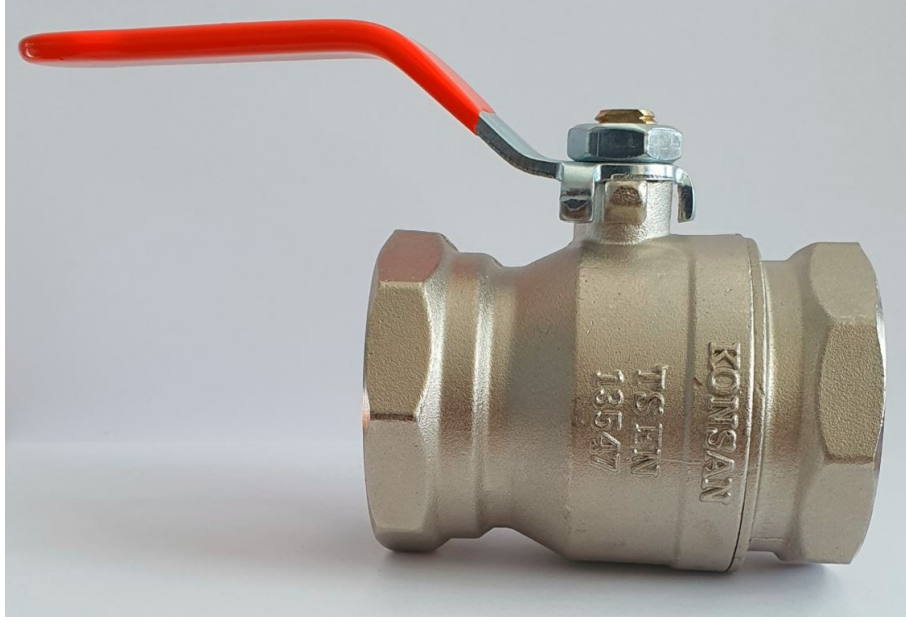


Ölçüler:

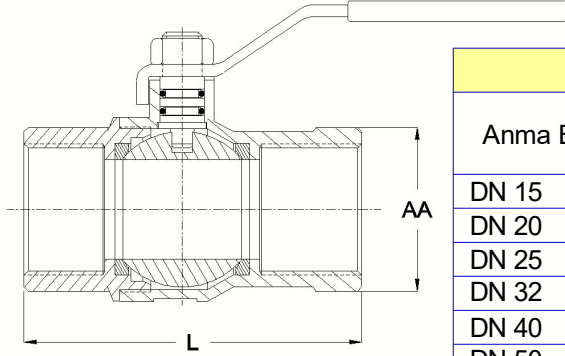

Yeni Seri PN25 Ölçü Tablosu

Anma Boyutu	L (mm)	AA (mm)	Çalışma Basıncı	Ağırlık
DN 15 - 1/2"	49,0	26,0	25 bar	140 gr
DN 20 - 3/4"	57,0	32,0	25 bar	240 gr
DN 25 - 1"	68,0	39,0	25 bar	325 gr
DN 32 - 1 1/4"	76,0	49,0	25 bar	520 gr
DN 40 - 1 1/2"	86,0	55,0	25 bar	800 gr
DN 50 - 2"	103,0	68,0	25 bar	1300 gr

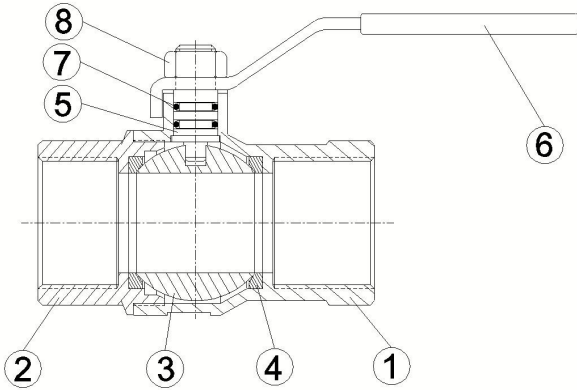

Malzeme Listesi

1	Gövde	CuZn40Pb2 (CW617N)
2	Kapak	CuZn40Pb2 (CW617N)
3	Küre	CuZn40Pb2 (CW617N)
4	Sızdırmazlık Ringi	PTFE (Teflon)
5	Mil	CuZn39Pb3 (CW614N)
6	Kol	Çelik (PVC kaplı)
7	Salmastra (O-ring)	NBR
8	Somun	Çelik (Galvaniz kaplı)

Kullanım Sıcaklıkları:

En az: Akışkan sıvı halde olmalıdır, küresel vana içinde donan akışkan küresel vanaya hasar verir.
En çok: 85°C

Kontrol Cihazları Sanayi ve Ticaret Ltd. Şti.

Marmara Sanayi Sitesi G 10 İkitelli Küçükçekmece / İstanbul

www.kontrolcihazlari.com.tr